

Commercial Unit



CSM250 - CSM3000

Available with non-reversing or reversing cells, producing from 250 to 3000 grams per hour

Efficient Switch Mode Power Supplies

Liquid cooled power supplies using heat exchanger technology

High-Quality lubrication free Pentair 2-way valves with the option for full automation

Completely new custom cell desing using up to 1 meter long cell chambers

Proven cell configuration incorporating the very best avaliable DS-MMO electrode ma- terial which is manufactured in the USA


Custom desing and fabrication to suite your installation Built-in


acid Wash System to increase cell life

Salinity Range 3,000 - 36,000 mg/L





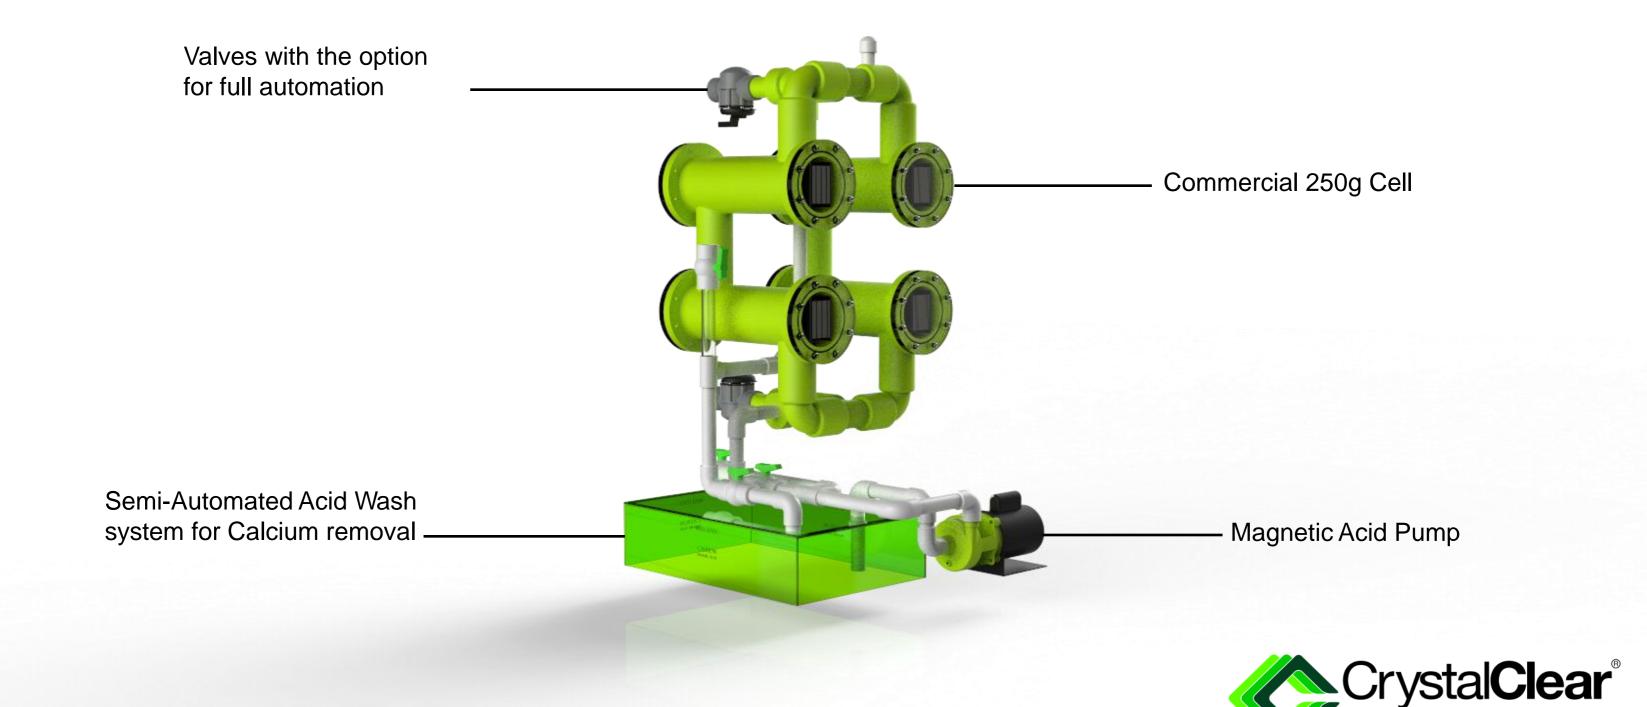

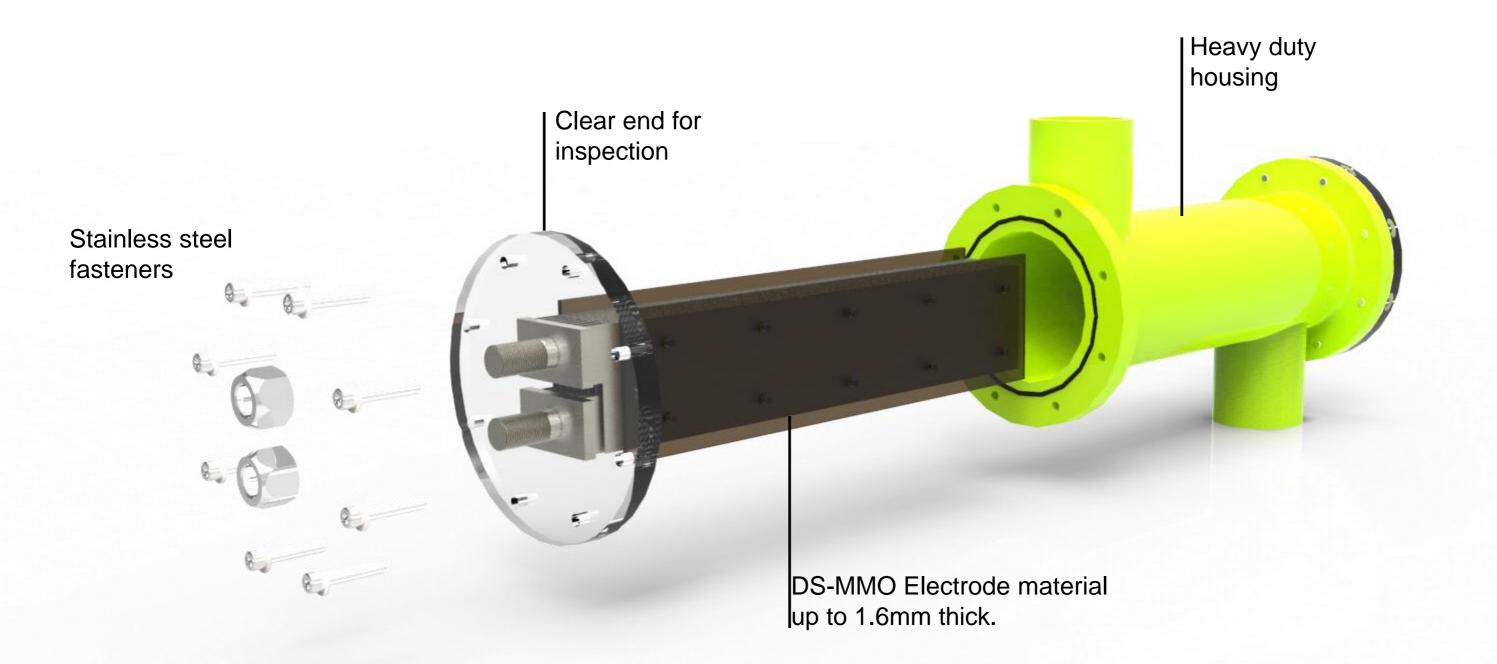





Unit 4 Laguna Seca Ballito South Africa 4420 Cell: +27 (0) 83 630 6189 Cell: +27 (0) 82 888 0582

Email: bruce@crystalchlor.co.za wsl1@mweb.co.za